




NOTECH
ELEGANCE IN TECHNOLOGY

SZ-1820V/1820VS

Higher Efficiency Through Better Design

MILLING MACHINE SYSTEM

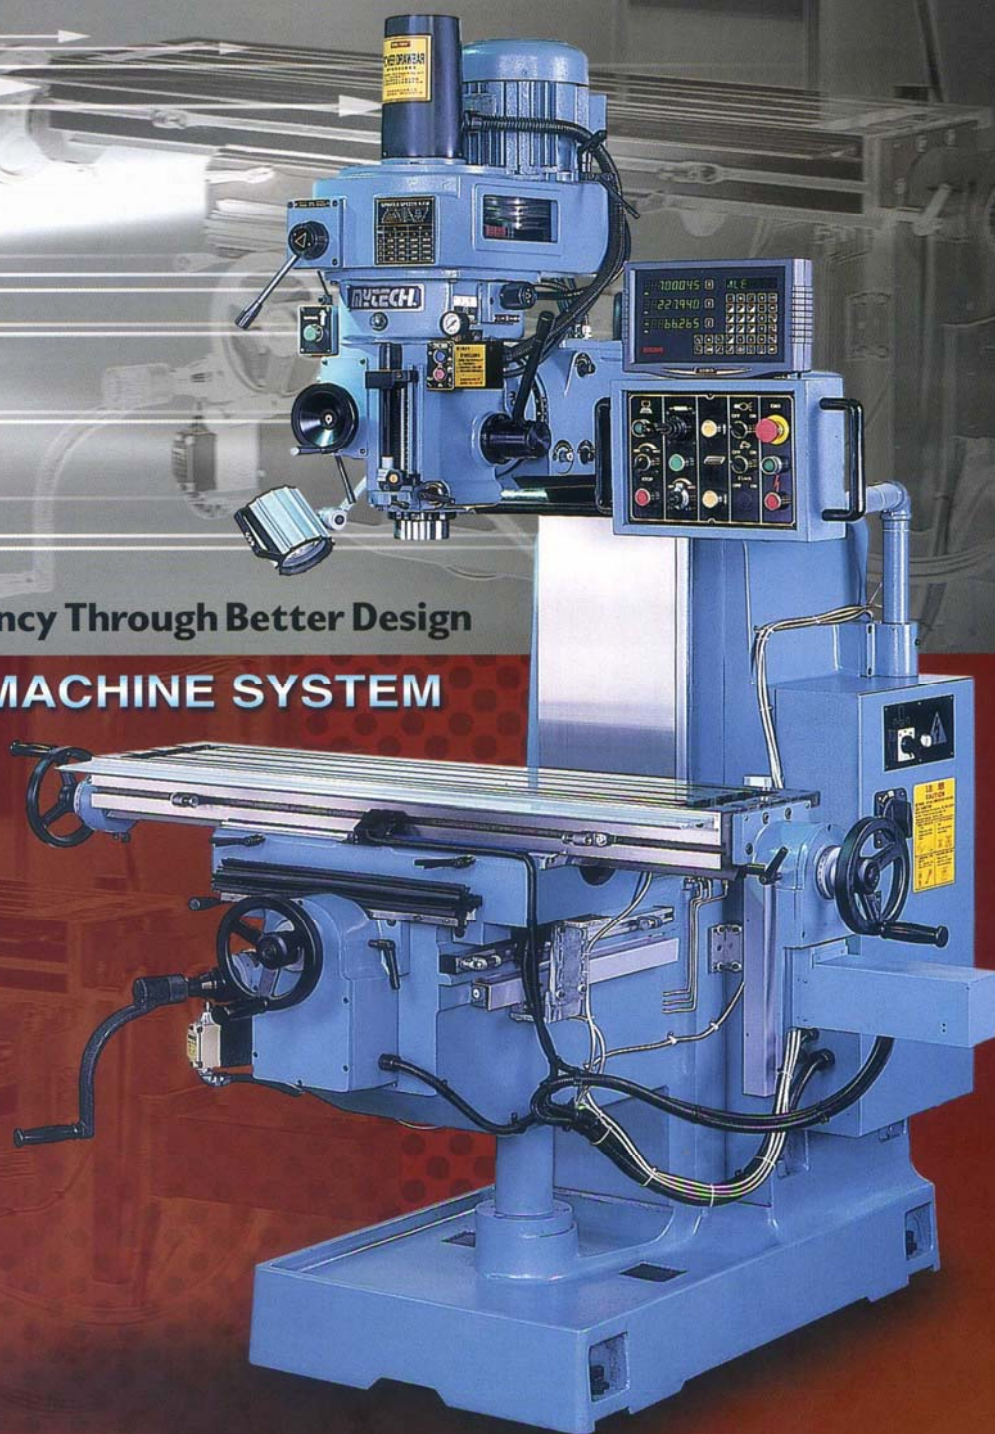

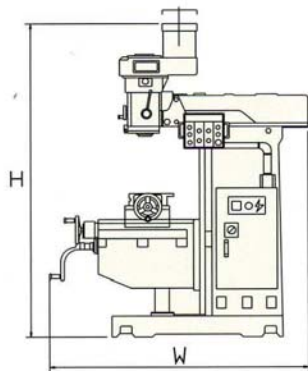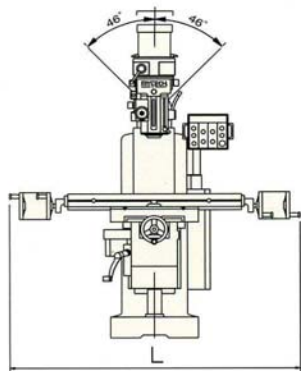

Standard Accessories


1. Draw bar. (manual)
2. Tool box and tools.
3. Chip cover on y axis. (rubber)
4. Working light
5. Tapping equipment of spindle
6. X DC servo motor

Optional Accessories


1. Draw bar. (pneumatic)
2. Y DC servo motor
3. Coolant system
4. Chip cover on y axis (stainless)
5. Table splash guard
6. Digital readout
7. CE regulation



Lubrication oil control valve
Pressure-reserved lubrication oil control valves are installed as standard to control lubrication oil supply as even as possible to ballscrew, Gear and 3 axes.



Optical scale protection
Protection design on optical scale is built-in from the design stage. It provides the collision & watering free from the scales during the cutting.



Quality inspection equipment
German-made 3D coordinate measuring machine is employed in our machine shop. All precision components and parts are precisely inspected.



High rigidity machine structure
FC30 & FCD45 are materialized on machine frame structure. All frames are compulsorily by tempering treatment to reduce the inner stress. It ensures the features of the highest resistance, deformation-free and highest rigidity. With enforced ribs design, the harmonious vibration during cutting is absolutely minimized. All machine life can be prolonged accordingly.



Precision ball screw

Pre-loaded with double nuts C5 class precision ballscrew is installed on X & Y axes ensuring the transmission quality- small backlash & fine positioning.

Specification		SZ-1820V
Main Spindle	Spindle speed	75~3600rpm 16 speed
	Spindle taper	NST #40
	Swive angle of head	45° (R&L)
	Overarm travel	450mm
	Quill travel	140mm
	Distance of spindle to table	0 ~ 520mm
	Distance of spindle center to column surface	165 ~ 615mm
	Quill feed per revolution of spindle	0.035/0.07/0.14mm(a circe)
Table	Working table area (LxW)	1200 x 290mm
	Longitudinal travel manual/auto	650mm
	Cross travel	350mm
	Vertical travel of knee	400mm
	T-slots	16 x 3 x 65mm
	Cutting federate (X)	1150mm / min
	Rapid traverse (X)	2300mm / min
	Table elevating speed	1150mm / min
Motor	Main spindle	3.7kw (5HP)
	Table elevating	0.75kw (1HP)
	Lubricating pump	150w
	Electromagnetic pump	40w
Machine Weight & Packing	Machine measurement(LxWxH)	1800 x 1640 x 2340mm
	Packing measurement(LxWxH)	1700 x 1900 x 2200mm
	Net weight	1780kgs
	Gross weight	2100kgs

Specification		SZ-1820VS
Main Spindle	Spindle speed	60~3600rpm variable speed
	Spindle taper	NST #40
	Swive angle of head	45° (R&L)
	Overarm travel	450mm
	Quill travel	140mm
	Distance of spindle to table	0 ~ 520mm
	Distance of spindle center to column surface	165 ~ 615mm
	Quill feed per revolution of spindle	0.035/0.07/0.14mm(a circe)
Table	Working table area (LxW)	1200 x 290mm
	Longitudinal travel manual/auto	650mm
	Cross travel	350mm
	Vertical travel of knee	400mm
	T-slots	16 x 3 x 65mm
	Cutting federate (X)	1150mm / min
	Rapid traverse (X)	2300mm / min
	Table elevating speed	1150mm / min
Motor	Main spindle	3.7kw (5HP)AC
	Table elevating	0.75kw (1HP)
	Lubricating pump	150w
	Electromagnetic pump	40w
Machine Weight & Packing	Machine measurement(LxWxH)	1800 x 1640 x 2450mm
	Packing measurement(LxWxH)	1700 x 1700 x 2200mm
	Net weight	1830kgs
	Gross weight	2150kgs

• All specification, dimension and design characteristics shown in this catalogue are subject to change without notice.

MYTECH
ELEGANCE IN TECHNOLOGY

SHOU ZUAN PRECISION MACHINE CO., LTD.

No.3, Alley 76, Lane 283, Shui Yuan Rd., Fong Yuan City, Taichung Hsien, Taiwan.

Website: www.mytech-cnc.com

Tel:886-4-25150719 / 886-4-25633015 / Fax:886-4-25632838